

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 062 803 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**26.02.2003 Bulletin 2003/09**

(51) Int Cl.<sup>7</sup>: **H04N 5/40**  
**// H04N5/775**

(21) Application number: **99911044.8**

(86) International application number:  
**PCT/US99/04568**

(22) Date of filing: **03.03.1999**

(87) International publication number:  
**WO 99/046930 (16.09.1999 Gazette 1999/37)**

(54) **INTERACTIVE SELECTION SYSTEM FOR A VIDEO DECODER MODULATOR CHANNEL**  
**INTERAKTIVES WAHLSYSTEM FÜR EINEN KANALMODULATOR EINES VIDEODEKODERS**  
**SYSTEME DE SELECTION INTERACTIVE DESTINE A UN CANAL MODULATEUR D'UN**  
**DECODEUR VIDEO**

(84) Designated Contracting States:  
**DE ES FR GB IT**

(30) Priority: **11.03.1998 US 38732**

(43) Date of publication of application:  
**27.12.2000 Bulletin 2000/52**

(73) Proprietor: **Thomson Licensing S.A.**  
**92648 Boulogne Cedex (FR)**

(72) Inventor: **PUGEL, Michael, Anthony**  
**Noblesville, IN 46060 (US)**

(74) Representative: **Kohrs, Martin**  
**Thomson multimedia**  
**46, quai A. Le Gallo**  
**92648 Boulogne-Billancourt Cedex (FR)**

(56) References cited:  
**EP-A- 0 452 976 WO-A-96/21990**  
**US-A- 4 336 555 US-A- 4 821 122**  
**US-A- 5 467 141 US-A- 5 495 282**  
**US-A- 5 541 671**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 062 803 B1**

## Description

[0001] This invention is related to the field of video signal processing and in particular, to modulator channel selection in a video decoder such as a satellite, television, VCR, set-top box or other receiver system, for example.

[0002] Video signal receivers such as direct broadcast satellite receivers and video cassette recorders (VCRs) provide video output signals as Radio Frequency (RF) modulated signals to a television receiver, for example. The carrier frequency selected for this RF modulation in the United States, for example, is usually the broadcast channel 3 or channel 4 television carrier frequency. Selection of one of these channels is typically accomplished by means of a user operated manual switch. This switch is usually located on the VCR or satellite receiver unit. The user of a satellite receiver, for example, is typically directed by an instruction manual to select the broadcast channel (3 or 4) that is not used in the user's local broadcast area. The user then selects that same channel on the television receiver to ensure that the television receiver is tuned to the same carrier frequency as the satellite receiver RF output.

[0003] A problem that may arise is incompatibility between a video receiver (e.g. satellite receiver or VCR) modulator output channel and the channel to which a television receiver, receiving the modulator output, is tuned. Such an incompatibility may occur if the user is unaware of the modulator channel setting of the video receiver, and sets the television receiver to a different channel. Then, the television receiver tuner will not be set to the same carrier frequency as the video receiver RF output signal. This situation may occur upon initial video receiver system set-up. However, such an incompatibility can also occur if the user forgets which modulator channel he has selected, if he inadvertently changes the modulator channel, or the modulator channel is changed without his knowledge.

[0004] The patent US-A-554 1671 discloses a satellite video receiver for providing output signals to a television signal receiver includes apparatus for operator selection of the modulator output channel frequency of the satellite receiver. The operator may select a modulator main channel, or an alternative manufacturer pre-set modulator default channel.

[0005] The patent US-A-5495282 discloses a system for monitoring use of a video monitoring system, RF signals are injected into a cable converter and a VCR in order to detect channels selected by the cable converter and VCR.

[0006] In a system in accordance with the principles of the present invention, communication compatibility is determined by the response of a user to a prompting message recognized by the user. The prompting message is communicated in compatible and non-compatible communication modes. The user recognizes the prompting message in a compatible communication

mode whereby the user does not need to know the required modulator channel setting.

[0007] The subject of the invention is a method for tuning a video signal receiver to a video accessory such as a TV receiver including an image processing device, to be compatible with a video receiver system, comprising the steps of:

generating a prompting message for display to prompt a user to initiate a command response;  
generating first and second output signals, each of said output signals incorporating said prompting message and only one of said output signals being compatibly tuned to said image processing device;  
alternately providing said first and said second output signals to said image processing device for legibly displaying said prompting message when one of said provided output signals is compatibly tuned to said image processing device; and  
selecting said compatible output signal in response to said command.

[0008] The subject of the invention is also a video signal receiver method for selecting a modulator output channel carrier to be compatible with a display means, comprising the steps of:

generating first and second modulator channel carrier frequencies;  
generating a prompting message for display to prompt a user to initiate a command response;  
modulating said first and said second modulator channel carriers with said prompting message to provide first and second modulated signals, said first and said second modulated signals being alternately provided to said display means for legibly displaying said prompting message only when said display means is compatibly tuned to one of said first and said second modulated signals; and  
selecting said modulator output channel carrier in response to said user initiated command, said selected modulator output channel carrier being said one of said first and said second modulator channel carriers providing said legibly displayed prompting message.

[0009] The subject of the invention is also a video signal receiver for modulating a modulator channel carrier frequency with received video program information to provide a modulated output signal compatible with a display means, said video receiver including apparatus for selecting a modulator output channel carrier comprising:

means for generating first and second modulator channel carrier frequencies;  
means for generating a prompting message for display to prompt a user to initiate a command re-

sponse;

means for modulating said first and said second modulator channel carriers with said prompting message to provide first and second modulated signals, said first and said second modulated signals being alternately provided to said display means for legibly displaying said prompting message only when said display means is compatibly tuned to one of said first and said second modulated signals; and means for selecting said modulator output channel carrier in response to said user initiated command, said selected modulator output channel carrier being said one of said first and said second modulator channel carriers providing said legibly displayed prompting message.

**[0010]** Other characteristics and advantages of the invention will become apparent through the description of a particular exemplary embodiment described with reference to the drawings among which:

Figure 1 shows an RF modulator for a video decoder incorporating a user interactive modulator channel selection system, according to the invention.

Figure 2 shows a process for selecting a video receiver modulator channel that is compatible with a display device, according to the invention.

**[0011]** The inventor has recognized that it is advantageous to minimize the knowledge and tasks required of a user in setting up and re-configuring video receiver equipment. Specifically, that it is desirable that a video receiver system (such as a satellite, terrestrial, or cable receiver or VCR), attached to a video accessory (such as a TV receiver), be capable of ensuring modulator channel compatibility with a minimum of user interference. Further that such compatibility is achievable without a user needing to know the required modulator channel setting.

**[0012]** A satellite video signal receiver modulator stage 12, incorporating the principles of the invention, is shown in the block diagram of Figure 1. A user selects a modulator channel in system 12 to be compatible with TV receiver 52 without the need to know the required modulator channel setting. A received video signal containing video program information, after processing by an input processor 14, is modulated onto a carrier frequency  $F_c$  by modulator 50. Modulator 50 receives carrier frequency  $F_c$  from a Phase-locked Loop (PLL) network 20 and provides an RF modulated output signal to a television receiver 52. The PLL output carrier frequency  $F_c$  is determined by a microprocessor 15 and by a reference frequency provided by a source 45. Microprocessor 15 selects the channel that is used as the modulator channel by controlling the carrier frequency  $F_c$  that is output by PLL 20. Microprocessor 15 configures and controls elements of PLL 20 and unit 47 using bi-directional control and data bus C. Selection of the

modulator channel is performed upon initial set-up of a video receiver and does not normally need to be repeated unless there is a change in configuration of the video receiver system or TV receiver 52 e.g. replacement of TV receiver 52 etc. However, the modulator channel selection may also be performed upon other conditions including, for example, upon a) power-on initialization, b) recovery from a fault condition including a power interruption and a software error, and c) a user initiated command.

**[0013]** PLL 20 is a conventional programmable phase locked loop composed of a phase/frequency detector 30, a compensation and amplification network 35, a voltage controlled oscillator (VCO) 40 and a programmable frequency divider 25. A logic control value is written by microprocessor 15 using control bus C into a register in programmable divider 25 to determine the PLL output carrier frequency  $F_c$  provided by VCO 40 to modulator 50. The PLL output frequency is divided by programmable divider 25 and compared by detector 30 to a frequency reference from source 45. The division performed by divider 25 is determined by the logic control value written to a register within divider 25 by microprocessor 15. An output voltage of detector 30, representing the phase/frequency error, is amplified and processed by unit 35 to provide an oscillation frequency control signal to VCO 40. The amplification and processing provided by unit 35 ensures the stability of the PLL. The processing provides compensation in the form of filtering, for example, as known.

**[0014]** The resultant VCO 40 output frequency determined by microprocessor 15 is the carrier frequency used by modulator 50. Modulator 50 frequency modulates this carrier frequency with either a prompting message produced by generator 47 under direction of microprocessor 15 or the input signal containing video program information from source 14. The modulated output signal from unit 50 is provided to TV receiver 52 for display of either the prompting message or video program information. In another embodiment modulator 50 may also provide a composite video output signal combining a prompting message and video program information in a single image. The modulated output signal from unit 50 may also be provided to other units as required.

**[0015]** The purpose of the prompting message is to prompt a user to initiate a command response such as pressing a button on remote control 60, for example. Microprocessor 15 examines such a command response to determine whether it was made within an expected response time window. If the response was made within an expected window it is treated by microprocessor 15 as an indication that the prompting message is legible and recognizable to the user and therefore that the modulator channel being used by system 12 is compatible with TV receiver 52.

**[0016]** Microprocessor 15 employs the process of Figure 2 for selecting a modulator channel for the video receiver modulator system 12 (Figure 1) that is compatible

with TV receiver 52. The system 12 modulator channel is selected to be compatible with TV receiver 52 without the user knowing the required modulator channel setting. This advantageously simplifies the modulator channel selection process and reduces user involvement in the process. Another advantage of the system is that it does not require use of an additional display device (separate from the video program display device e.g. unit 52) for indicating a modulator channel setting to a user.

**[0017]** In step 205, following the start at step 200, PLL 20 under direction of microprocessor 15 selects an initial modulator channel carrier such as cable television channel 3, for example, and outputs the corresponding channel 3 carrier frequency Fc to modulator 50. In step 210, generator 47, under direction of microprocessor 15, generates a prompting message for output to modulator 50. In step 215, the prompting message is modulated with the carrier Fc selected in step 205 and the modulated output signal is provided to TV receiver 52 for display to a user. Receiver 52 is advantageously used to display either the prompting message or the video program content thereby eliminating the need for a separate display device. However, in another embodiment a separate display device may be used for display of the prompting message.

**[0018]** The prompting message may take the form of any message such that, when it is displayed on unit 52, it prompts a user to initiate a command response such as pressing a button on remote control unit 60. The message may say "Press Select Button on the Remote", for example, and does not need to show a required modulator channel setting. Alternatively, the prompting message may comprise an image element identified as a user prompt in a video receiver operation manual or may comprise other text, an icon, a graphic element, or a flashing image, for example. Further, instead of commanding a user to press a button on remote unit 60, the message may direct a user to press a keyboard button, or a switch on the video receiver, or a switch on accessory equipment communicating with the video receiver. Alternatively, a user may be directed to select an icon on a displayed menu using a cursor type control, for example. It is sufficient that the prompting message and associated user response mechanism provide microprocessor 15 with a feedback response indicating the user has been able to read the prompting message displayed on unit 52.

**[0019]** In step 220, the prompting message is provided by modulator 50 to TV receiver 52 for display for three seconds duration under control of microprocessor 15. In step 225, microprocessor 15 determines whether a response has been received from a user e.g. whether the user pressed the "Select" button on remote unit 60 within the three seconds time period. The three seconds duration is arbitrary and may be longer or shorter depending on custom user or system requirements. If a user command response was received within the three

second period, it indicates that the selected modulator channel (channel 3 in this example) is compatible with TV receiver 52 since a user was able to read the prompting message displayed on unit 52. In this case, microprocessor 15 in step 230, stores the modulator channel setting (channel 3 in this example) in non-volatile memory as the modulator channel to be used from then on.

**[0020]** The modulator channel selection process of Figure 2 is normally employed at initial set-up of the combined video receiver and TV 52 system. The process of Figure 2 does not need to be repeated except for conditions as previously discussed such as for system reconfiguration, system recovery or upon a user command. The process of Figure 2 terminates at step 235.

**[0021]** If a user response was not received within the three second period in step 225, the selected modulator channel (channel 3 in this example) is deemed to be incompatible with TV receiver 52. An incompatibility between modulator channel settings of system 12 and TV receiver 52 results in an invalid, illegible or error initiated default image display on TV unit 52. Such an incompatibility prevents the prompting message from being legibly displayed on unit 52 and so prevents the consequent user command response. In this case, microprocessor 15 in step 225 directs that another modulator channel (e.g. channel 4) be selected in step 205 and that the process of steps 210-225 are repeated for the new modulator channel selection.

**[0022]** As previously described, a prompting message is again generated in step 210 for output to modulator 50. In step 215, the prompting message is modulated with the carrier Fc selected in step 205 and the modulated output signal is provided to TV receiver 52 in step 220 for display to a user for three seconds duration. In step 225, microprocessor 15 again determines whether a response has been received from a user e.g. whether the user pressed the "Select" button on remote unit 60 within the three seconds time period. If a command response was received within the three second period, the selected modulator channel (channel 4 in this iteration) is deemed to be compatible with TV receiver 52 and the channel 4 setting is stored in step 230 in non-volatile memory as the modulator channel to be used from then on. The process of Figure 2 terminates at step 235.

**[0023]** The process of Figure 2 may be used to select a modulator channel from more than just two channels such as channels 3 and 4 in this example. In order to select a channel from N channels, for example, microprocessor 15 directs the repetition of steps 205-225 up to N times until a compatible channel is determined in the manner previously described. Further, steps 205-225 may be cyclically repeated to allow a user successive opportunities to respond to a prompt message. In this case, a message is presented to TV unit 52 on a first channel for three seconds then on a second channel for three seconds and then again on the first and second channels. This may be repeated as often as desired.

**[0024]** An error condition may occur in step 225 during the three second period when no prompting message is displayed on TV receiver 52. This is because a user may inadvertently press the "Select" button during this period, even though there is a modulator channel incompatibility between system 12 and TV receiver 52 and no prompting message is being displayed. This results in an incorrect modulator channel selection being made by microprocessor 15. Under this and other error conditions a user does not obtain a valid picture on the unit 52 display and he is directed to follow a recovery procedure by the user operation manual. For example, the user may be directed to repeat the set-up procedure of Figure 2 by invoking specific commands using remote unit 60. Alternatively, the user may be directed to follow a different set-up or fault diagnosis procedure that involves changing modulator channels to achieve modulator channel compatibility or to identify a system fault causing the channel incompatibility. The opportunity for a user to make a n inadvertent selection in step 225 may be mitigated by requiring a more complicated response. For example, in step 225, more than one button or a specific button press sequence may be required or a menu item may have to be selected to indicate assent to the selection of the modulator channel.

**[0025]** A user is also directed to follow a recovery process upon the occurrence of a time-out error condition. Such an error condition may occur, for example, when no user response is received at all during the complete execution of the Figure 2 process. Under such a time-out error condition, the user is directed by a user operation manual to follow a recovery process of the type previously described.

**[0026]** The configuration of elements of Figure 1 is exemplary only and the process of Figure 2 may be implemented in whole or in part within the programmed instructions of a microprocessor such as microprocessor 15. Further, although the invention is described in the context of an adjustable modulator channel selection system, it is also applicable in any other modulator channel selection system such as a two channel (channels 3 and 4) system as commonly used in the U.S.. In addition, the principles of the invention may be employed to determine communication compatibility in a variety of systems. Specifically, the principles may be employed in any system in which communication compatibility may be determined by the response of a user to a communicated prompting message that is derivable in a compatible communication mode. For example, the invention principles may be employed in a satellite, terrestrial, or cable broadcast receiver or in a, video recorder, television, computer, set-top box, telephone or other communication device. Further, the invention is not limited to frequency, amplitude or phase modulation but applies to any form of analog or digital communication e. g. PAM, QAM, QPSK, MPEG communication etc. in which a prompting message may be compatibly conveyed to an accessory device. The expression "modu-

lating a modulator channel carrier frequency" is intended to encompass amplitude, frequency and phase modulation and other forms of signal modulation.

## Claims

1. A method for tuning a video signal receiver to a video accessory such as a TV receiver including an image processing device, to be compatible with a video receiver system, comprising the steps of:

generating a prompting message for display to prompt a user to initiate a command response; generating first and second output signals, each of said output signals incorporating said prompting message and only one of said output signals being compatibly tuned to said image processing device; alternately providing said first and said second output signals to said image processing device for legibly displaying said prompting message when one of said provided output signals is compatibly tuned to said image processing device; and selecting said compatible output signal in response to said command.

2. A method according to claim 1, wherein in said step of generating a prompting message, said prompting message excludes reference to modulator channel settings.

3. A method according to claim 1, including the step of providing video program information received by said video receiver to said image processing device, whereby said program information and said prompting message are displayed by said image signal processing device.

4. A video signal receiver method for selecting a modulator output channel carrier to be compatible with a display means, comprising the steps of:

generating first and second modulator channel carrier frequencies; generating a prompting message for display to prompt a user to initiate a command response; modulating said first and said second modulator channel carriers with said prompting message to provide first and second modulated signals, said first and said second modulated signals being alternately provided to said display means for legibly displaying said prompting message only when said display means is compatibly tuned to one of said first and said second modulated signals; and selecting said modulator output channel carrier

- in response to said user initiated command, said selected modulator output channel carrier being said one of said first and said second modulator channel carriers providing said legibly displayed prompting message.
5. A method according to claim 4, wherein in said step of generating a prompting message, said prompting message excludes reference to modulator channel settings.
  6. A video signal receiver for modulating a modulator channel carrier frequency with received video program information to provide a modulated output signal compatible with a display means, said video receiver including apparatus for selecting a modulator output channel carrier comprising:
 

means (20) for generating first and second modulator channel carrier frequencies;

means (47) for generating a prompting message for display to prompt a user to initiate a command response;

means (14,50) for modulating said first and said second modulator channel carriers with said prompting message to provide first and second modulated signals, said first and said second modulated signals being alternately provided to said display means for legibly displaying said prompting message only when said display means is compatibly tuned to one of said first and said second modulated signals; and

means (15,60) for selecting said modulator output channel carrier in response to said user initiated command, said selected modulator output channel carrier being said one of said first and said second modulator channel carriers providing said legibly displayed prompting message.
  7. Apparatus according to claim 6, wherein said prompting message excludes reference to modulator channel settings.
  8. Apparatus according to claim 6, wherein said user initiated command, prompted by said prompting message, is independent of modulator channel setting requirements.
  9. Apparatus according to claim 6, wherein said prompting message is at least one of a) a text message, b) an icon, c) a graphic element, d) a flashing image and e) an image element identified to a user in video receiver operation information as a prompt.
  10. Apparatus according to claim 6, wherein said selecting means selects said modulator

output channel carrier from among more than two modulator channel carriers.

11. Apparatus according to claim 6, wherein said first and said second modulated signals are alternately provided to said display means for display of said prompting message for a limited time period upon a video receiver condition including at least one of a) video receiver set-up, b) power-on initialization, c) recovery from a fault condition including a power interruption and a software error, and d) a user initiated command.
12. Apparatus according to claim 6, wherein said first and said second modulated signals are alternately and cyclically provided to said display means for repetitive display of said prompting message.

#### Patentansprüche

1. Verfahren zur Abstimmung eines Videosignalempfänger auf ein Videozusatzgerät wie einen Fernsehempfänger mit einem Bildverarbeitungsgerät, um mit einem Videoempfängersystem kompatibel zu sein, mit folgenden Schritten:

Erzeugung einer Aufforderungsnachricht zur Wiedergabe einer Aufforderung an einen Benutzer, eine Befehlsantwort auszulösen, Erzeugung eines ersten und eines zweiten Ausgangssignals, wobei jedes dieser Ausgangssignale eine Aufforderungsnachricht enthält und nur eines der Ausgangssignale kompatibel auf das Bildverarbeitungsgerät abgestimmt ist, abwechselnde Lieferung des ersten und des zweiten Ausgangssignal zu dem Bildverarbeitungsgerät zur lesbaren Wiedergabe der Aufforderungsnachricht, wenn eines der gelieferten Ausgangssignale kompatibel auf das Bildverarbeitungsgerät abgestimmt ist, und Wahl des kompatiblen Ausgangssignals aufgrund des Befehls.

2. Verfahren nach Anspruch 1, wobei in dem Schritt zur Erzeugung einer Aufforderungsnachricht die Aufforderungsnachricht einen Bezug auf die Einstellungen des Modulatorkanals ausschließt.
3. Verfahren nach Anspruch 1 mit dem Schritt der Lieferung durch den Videoempfänger empfangenen Videoprogramminformationen zu dem Bildverarbeitungsgerät, wodurch die Programminformationen und die Aufforderungsnachricht durch das Bildsignalverarbeitungsgerät wiedergegeben

werden.

4. Videosignalempfänger-Verfahren zur Wahl, dass ein Träger eines Modulatorausgangskanals kompatibel ist mit Wiedergabemitteln, mit folgenden Schritten:

Erzeugung der ersten und der zweiten Trägerfrequenz des Modulatorkanals,  
Erzeugung einer Aufforderungsnachricht für eine Wiedergabe zur Aufforderung eines Benutzers, eine Befehlsantwort auszulösen,  
Modulation des ersten und des zweiten Trägers des Modulatorkanals mit der Aufforderungsnachricht zur Lieferung eines ersten und eines zweiten modulierten Signals, wobei das erste und das zweite modulierte Signal abwechselnd nur dann für eine lesbare Wiedergabe der Aufforderungsnachricht zu den Wiedergabemitteln geliefert werden, wenn die Wiedergabemittel auf das erste oder das zweite modulierte Signal kompatibel abgestimmt sind, und  
Wahl des Trägers des Modulatorausgangskanals aufgrund des vom Benutzer ausgelösten Befehls, wobei der ausgewählte Träger des gewählten Modulatorausgangskanals der erste oder der zweite Träger des Modulatorausgangskanals ist, der die Aufforderungsnachricht lesbar wiedergibt.

5. Verfahren nach Anspruch 4, wobei in dem Schritt zur Erzeugung einer Aufforderungsnachricht die Aufforderungsnachricht einen Bezug auf die Einstellungen des Modulatorkanals ausschließt.

6. Videosignalempfänger zur Modulation einer Trägerfrequenz eines Modulatorkanals mit den empfangenen Videoprogramminformationen zur Lieferung eines modulierten Ausgangssignals, das kompatibel ist mit einem Wiedergabemittel, wobei der Videoempfänger eine Vorrichtung zur Wahl eines Trägers eines Modulatorausgangssignals enthält, mit:

Mitteln (20) zur Erzeugung der ersten und der zweiten Trägerfrequenz des Modulatorkanals, Mitteln (47) zur Erzeugung einer Aufforderungsnachricht für die Wiedergabe zur Aufforderung eines Benutzers, eine Befehlsantwort auszulösen,  
Mitteln (14, 50) zur Modulation des ersten und des zweiten Trägers des Modulatorkanals mit der Aufforderungsnachricht zur Lieferung eines ersten und eines zweiten modulierten Signals, wobei das erste und das zweite modulierte Signal abwechselnd zu den Wiedergabemitteln für eine lesbare Wiedergabe der Aufforde-

rungsnachricht nur dann geliefert werden, wenn die Wiedergabemittel kompatibel auf das erste oder das zweite modulierte Signal abgestimmt sind, und

Mitteln (15, 60) zur Wahl des Trägers des Modulatorausgangskanals aufgrund des von dem Benutzer ausgelösten Befehls, wobei der Träger des gewählten Modulatorausgangssignals derjenige des ersten und zweiten Trägers des Modulatorkanals ist, der die lesbar wiedergegebene Aufforderungsnachricht liefert.

7. Vorrichtung nach Anspruch 6, wobei die Aufforderungsnachricht einen Bezug auf die Einstellungen des Modulatorkanals ausschließt.
8. Vorrichtung nach Anspruch 6, wobei der vom Benutzer ausgelöste Befehl, der durch die Aufforderungsnachricht aufgefordert worden ist, unabhängig von den Anforderungen an die Einstellungen des Modulatorkanals ist.
9. Vorrichtung nach Anspruch 6, wobei die Aufforderungsnachricht wenigstens eine ist von a) eine Textnachricht, b) ein Icon, c) ein grafisches Element, d) ein blinkendes Bild und e) ein Bildelement, dass von einem Benutzer in den Videoempfängerbetriebsinformationen als eine Aufforderung erkannt wird.
10. Vorrichtung nach Anspruch 6, wobei die Auswahlmittel den Träger des Modulatorausgangskanals aus mehr als zwei Trägern des Modulatorkanals auswählen.
11. Vorrichtung nach Anspruch 6, wobei das erste und das zweite modulierte Signal abwechselnd zu den Wiedergabemitteln geliefert werden zur Wiedergabe der Aufforderungsnachricht für eine begrenzte Zeitperiode aufgrund eines Videoempfängerzustands mit wenigstens meinem von a) Videoempfänger-Einrichtung, b) Einschalten der Betriebsspannung, c) Wiedergewinnung aus einem Fehlerzustand mit einer Betriebsspannungsunterbrechung und einem Softwarefehler und d) ein vom Benutzer ausgelöster Befehl.
12. Vorrichtung nach Anspruch 6, wobei das erste und das zweite modulierte Signal abwechselnd und zyklisch zur wiederholten Wiedergabe der Aufforderungsnachricht zu den Wiedergabemitteln geliefert werden.

## Revendications

1. Procédé de syntonisation d'un récepteur de si-

- gnaux vidéo à un appareil vidéo annexe tel que, par exemple, un récepteur de télévision, intégrant un dispositif de traitement d'images, en vue de la compatibilité avec un système de réception vidéo, comprenant les étapes suivantes :
- 5 création d'un message-guide pour l'affichage afin d'inviter un utilisateur à lancer une réponse commande ;
- 10 création de premier et second signaux de sortie, chacun desdits signaux de sortie intégrant ledit message-guide et un seul desdits signaux de sortie étant syntonisé de manière compatible audit dispositif de traitement d'images ;
- 15 transmission en alternance desdits premier et second signaux de sortie audit dispositif de traitement d'images pour afficher lisiblement ledit message-guide lorsque l'un desdits signaux de sortie émis est syntonisé de manière compatible audit dispositif de traitement d'images ; et
- 20 sélection dudit signal de sortie compatible en réponse à ladite commande.
2. Procédé conforme à la revendication 1, dans lequel dans ladite étape de création d'un message-guide, ledit message-guide exclut la référence aux réglages du canal modulateur.
- 25
3. Procédé conforme à la revendication 1, incluant l'étape de
- 30 fourniture d'informations de programmes vidéo reçues par ledit récepteur vidéo audit dispositif de traitement d'images, par lequel lesdites informations de programmes et ledit message-guide sont affichés par ledit dispositif de traitement de signaux d'images.
- 35
4. Procédé de réception de signaux vidéo permettant de sélectionner une porteuse d'un canal de sortie du modulateur en vue de la compatibilité avec un système d'affichage, comprenant les étapes suivantes :
- 40 création de première et de seconde fréquences porteuses de canal modulateur ;
- 45 création d'un message-guide pour l'affichage afin d'inviter un utilisateur à lancer une réponse commande ;
- 50 modulation desdites première et seconde porteuses de canal modulateur à l'aide dudit message-guide pour fournir des premier et second signaux modulés, lesdits premier et second signaux modulés étant fournis en alternance audit système d'affichage pour afficher lisiblement ledit message-guide seulement lorsque ledit système d'affichage est syntonisé de manière compatible avec l'un desdits premier et second signaux modulés ; et
- 55
- sélection de ladite porteuse de canal de sortie du modulateur en réponse à ladite commande lancée par l'utilisateur, ladite porteuse de canal de sortie du modulateur sélectionnée étant l'une desdites première et seconde porteuses de canal modulateur fournissant ledit message-guide affiché lisiblement.
5. Procédé conforme à la revendication 4, dans lequel dans ladite étape de création d'un message-guide, ledit message-guide exclut la référence aux réglages du canal modulateur.
6. Récepteur de signaux vidéo permettant de moduler une fréquence porteuse de canal modulateur avec des informations de programmes vidéo reçues pour fournir un signal de sortie modulé compatible avec un système d'affichage, ledit récepteur vidéo incluant un appareil permettant de sélectionner une porteuse de canal de sortie du modulateur comprenant :
- un système (20) permettant de générer des première et seconde fréquences porteuses de canal modulateur ;
- un système (47) permettant de générer un message-guide pour l'affichage afin d'inviter un utilisateur à lancer une réponse commande ;
- un système (14, 50) permettant de moduler lesdites première et seconde porteuses de canal modulateur avec ledit message-guide pour fournir des premier et second signaux modulés, lesdits premier et second signaux modulés étant fournis en alternance audit système d'affichage pour afficher lisiblement ledit message-guide seulement lorsque ledit système d'affichage est syntonisé de manière compatible à l'un desdits premier et second signaux modulés ; et
- un système (15, 60) permettant de sélectionner ladite porteuse de canal de sortie du modulateur en réponse à ladite commande lancée par l'utilisateur, ladite porteuse de canal de sortie du modulateur sélectionnée étant l'une desdites première et seconde porteuses de canal modulateur fournissant ledit message-guide affiché lisiblement.
7. Appareil conforme à la revendication 6, dans lequel ledit message-guide exclut la référence aux réglages du canal modulateur.
8. Appareil conforme à la revendication 6, dans lequel ladite commande lancée par l'utilisateur, entraînée par ledit message-guide, est indépendante des exigences de réglage du canal modulateur.
9. Appareil conforme à la revendication 6, dans lequel

ledit message-guide est au moins un des éléments suivants : a) un message textuel, b) une icône, c) un élément graphique, d) une image clignotante et e) un élément d'image désigné à un utilisateur dans les informations de fonctionnement d'un récepteur vidéo comme un message-guide. 5

10. Appareil conforme à la revendication 6, dans lequel ledit système de sélection sélectionne ladite porteuse de canal de sortie du modulateur parmi plus de deux porteuses de canal modulateur. 10

11. Appareil conforme à la revendication 6, dans lequel lesdits premier et second signaux modulés sont fournis en alternance audit système d'affichage pour l'affichage dudit message-guide sur une période de temps limitée lors d'une condition de réception vidéo incluant au moins a) l'installation du récepteur vidéo, b) l'initialisation de l'alimentation, c) la récupération d'une condition d'erreur, notamment une coupure de courant et une erreur logicielle, et d) une commande lancée par l'utilisateur. 15 20

12. Appareil conforme à la revendication 6, dans lequel lesdits premier et second signaux modulés sont fournis en alternance et de façon cyclique audit système d'affichage pour l'affichage répétitif dudit message-guide. 25

30

35

40

45

50

55

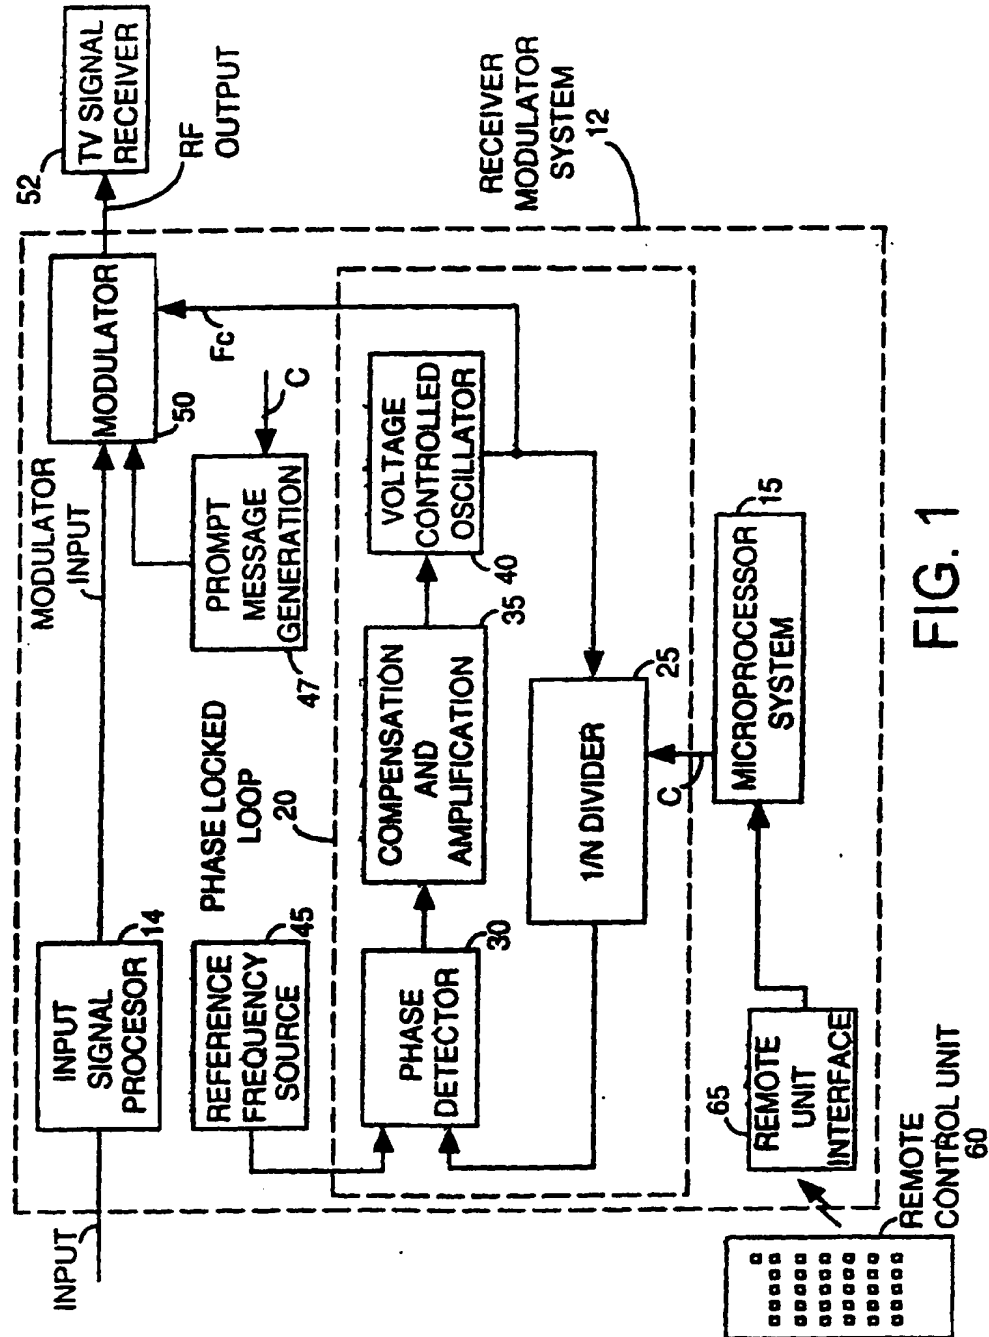


FIG. 1

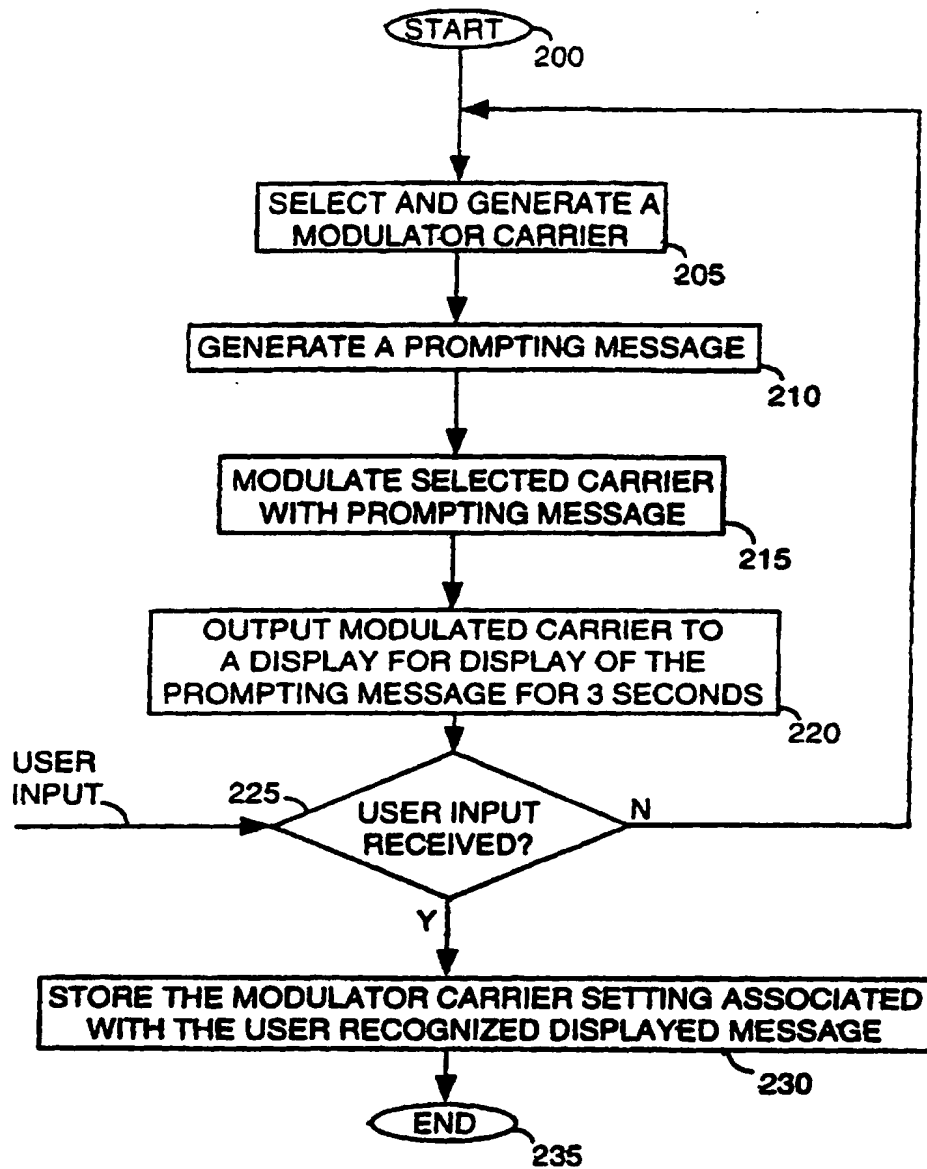


FIG. 2